

Technical Specifications

PRESSURE MEASURING RANGE (MH2O)

	1 ... 5	> 5 ... 20	> 20 ...250
Overpressure	3 bar	3 x FS (\geq 3 bar)	3 x FS
Burst pressure, (1)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (2), (\pm % FS)	\leq 0.25	\leq 0.1	\leq 0.1
Total error, (3), (4) (\pm % FS)			
-10...50°C, (typ./max.)	\leq 0.15 / 0.3 (\leq 200 mbar: 0.3 / 0.6)	\leq 0.15 / 0.3	\leq 0.15 / 0.3
-25...85°C, (typ./max.)	\leq 0.65 / 0.7 (\leq 200 mbar: 0.65 / 0.8)	\leq 0.65 / 0.7	\leq 0.55 / 0.7
Long term stability, (5)	\leq 0.5% FS/< 4 mbar	\leq 0.2% FS/< 4 mbar	\leq 0.1% FS/< 0.2% FS

(1) Transducer

(2) Zero based accuracy according to DIN 16086, incl. hysteresis and repeatability at ambient temperature

(3) Total error including accuracy and temperature influences at maximum signal span (16 mA)

(4) Active compensated

(5) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

TEMPERATURE MEASURING RANGE

Standard, (1), (2)	-10...50 °C
Lower end of range (2)	-25 °C
Upper end of range (2)	85 °C
Accuracy	$\leq \pm$ 2 °C



(1) Available active compensated only

(2) Depending on temperature range of the active compensation

TEMPERATURE RANGE

Operating temperature	-5...80 °C
Process temperature	-5...80 °C
Storage temperature	-10...80 °C

ELECTRICAL SPECIFICATIONS

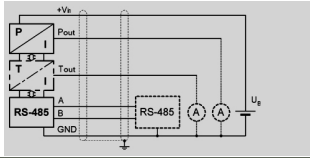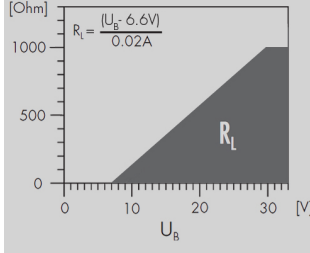Output	
Digital	RS485
Protocol	Modbus RTU
Analog	4...20 mA
Resolution	
Digital output	0.01% FS
Analog output	0.025% FS
Output adjustable	
4 mA	-5% FS...105% FS
20 mA	-5% FS...105% FS
Span	25% FS...110% FS (≥ 0.1 mH ₂ O)
Low pass filter	0.1 / 1 / 10 / 30 Hz (standard: 30 Hz)
Power supply	9...30 V DC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

QUALIFICATIONS

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	4 G (4...100 Hz / ± 3.2 mmpp)	
EN 60068-2-27	Shock	100 G (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBµV/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	4 kV contact / 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...1 GHz)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-5	Surge	10 kA (8 / 20 µs), (1)	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

(1) Only with optional surge (lightning) protection

PHYSICAL SPECIFICATIONS

Materials	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez, NBR
Cable	PUR, FEP, PE
Weight (2)	157 g

(1) Hastelloy (C-276) on request

(2) Specification for a PTM/N/RS485, closed, cable

Equipment

OVERVIEW

10.00.0091	Accessories overview

INTERFACE

101138	PTM - Interface

SOFTWARE

101224	PC Software V1.50

Additional documents

MANUALS

	Article number	Description
10.00.0079	DEB003	Configuration software
10.00.0089	DEB005	User manual

OPERATING AND SAFETY INSTRUCTIONS

	Article number
10.00.0137	DMM009

Ordering information

	X.	XXXX.	XXXX.	XX.	XXX
Type					
	PTM/N/RS485	44			
Pressure type					
	Gauge	1			
	Absolute (vacuum)	2			
Pressure measuring range					
	Any pressure measuring ranges between 0...1 mH2O and 0...250 mH2O available	XX			
	Offset, special adjustment	99			
Process connection					
	Closed (Fig. 1)	55			
	Closed, (1.4435), for ACS certification (Fig. 1)	59			
	Open, (Fig. 2)	56			
	G 1/4 M (Fig. 3)	11			
	G 1/2 M (Fig. 3)	13			
	Custmized	99			
Electrical connection					
	PE cable, IP 68 (2), (3)	13			
	PUR cable, black, IP 68 (2), (4)	15			
	FEP cable, black, IP 68 (2)	21			
	PVC cable, blue, IP 68 (2), (5)	14			
	Customized	99			
Output signal					
	RS485 / 4...20mA (pressure)	62			
	RS485 / 4...20 mA (pressure) with surge protection	64			
	RS485 / 4...20mA (pressure and temperature) (6)	65			
	RS485 / 4...20mA (pressure and temperature) with surge protection (6)	66			
Accuracy					
	$\leq \pm 0.25 \% \text{ FS } (\leq 5 \text{ mH2O})$	1			
	$\leq \pm 0.1 \% \text{ FS } (> 5 \text{ mH2O})$	2			
Temperature range					
	-5...50 °C compensated process temperature: -5...50 °C	(allowed)	4		
	-5...80 °C compensated process temperature: -5...80 °C	(allowed)	5		
Option 1					
	Cutting ring connection G1/2 M			G	
	Strain relief				
	Special oil filling: Anderol Food				
Option 2					
	Electronics packed in gel: Gauge pressure			C	
	Electronics packed in gel: Absolute pressure			D	
Option 3					
	Ballast weight 1.4435			B	
	Active compensated			E	
	Version titanium (without ballast weight)			K	
	Seals: Viton (standard)			U	

Seals: EPDM			S
Seals: Kalrez (Level)			T
Seals: NBR (ACS)			H
Humidity filter element for gauge versions (only for PUR and PE cable)			Z

- (2) Please specify the required cable length and medium
- (3) Suitable for drinking water (food approved)
- (4) For operating temperature > 50°C, PE or FEP cable must be used
- (5) ACS Certification
- (6) Temperature output only with option "active compensated" available

Technical drawings

Dimensions

Fig. 1: Closed version

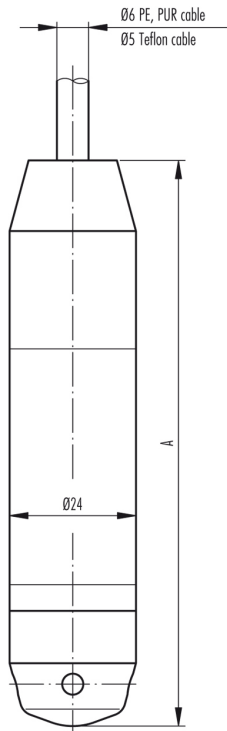


Fig. 2: Open version


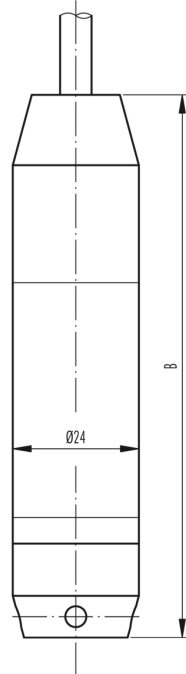


Fig. 3: with process connection

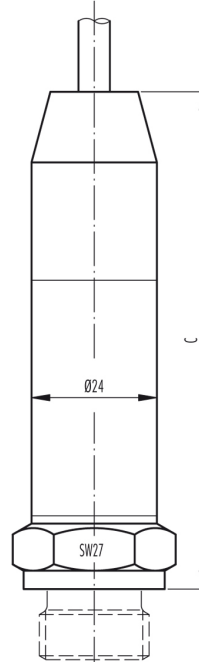

Standard	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	157	153	on request*	on request*	approx. 200
with ballast weight	244	240	on request*	on request*	approx. 460

*C: Depending on process connection

*D: Depending on process connection or version

Version with surge (lightning) protection


	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	258	254	on request*	on request*	approx. 280
with ballast weight	345	341	on request*	on request*	approx. 540

*C: Depending on process connection

*D: Depending on process connection or version

Colour	RS485
white	+Vin
yellow	GND
brown	Pout
pink	Tout
green	A
gray	B

Scheme:

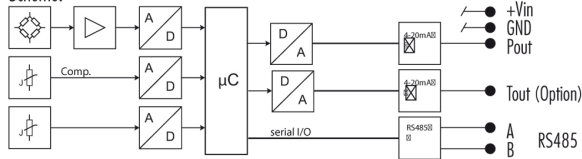

Specifications may change without notice.

ST5 Headquarters, Switzerland:
ST5 Sensor Technik, Sirmach AG
Rütihofstrasse 8 | 8370 Sirmach | Switzerland
sales@st5sensors.com | www.st5sensors.com

ST5 China:
ST5 Sensor Technology (Shanghai) Co. Ltd
Room 2603-2606 | North Building, Fortune | 108 Square
Lane 1839 | Qixin Road | Minhang District | Shanghai | China
sales@st5sensors.com | www.st5sensors.com.cn

ST5 France:
ST5 France
844 Route de la Caille | 74350 Allonzière la Caille | France
info-fr@st5sensors.com | www.st5sensors.fr

ST5 Germany:
ST5 Sensoren Transmitter Systeme GmbH
Poststrasse 7 | 71063 Sindelfingen | Germany
info-de@st5sensors.com | www.st5sensors.de

ST5 Great Britain:
ST5 Great Britain Ltd.
Box 3942 | Warwick | CV34 9AE | United Kingdom
contact@st5sensors.com | www.st5sensors.co.uk

ST5 Italy:
ST5 Italia s.r.l.
Via Lambro 36 | 20090 Opera (MI) | Italy
info-italia@st5sensors.com | www.st5sensors.it




SCIGATE AUTOMATION (S) PTE LTD
No. 1 Bukit Batok Street 22 #01-01 Singapore 659592
Tel: (65) 6561 0488 Fax: (65) 6562 0588
Email: sales@scigate.com.sg Web: www.scigate.com.sg
Business Hours: Monday - Friday 8.30am - 6.15pm